



6EB8

6EB8

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

9-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Voltage. 6.3 $\pm$ 10% . . . ac or dc volts

Current. 0.75 amp

Direct Interelectrode Capacitances:^o

Triode Unit:

Grid to plate. 4.4 μ fGrid to cathode and heater . . . 2.4 μ fPlate to cathode and heater. . . 0.36 μ f

Pentode Unit:

Grid No.1 to plate 0.1 max. μ f

Grid No.1 to cathode &

internal shield & grid

No.3, grid No.2, and

heater 11 μ f

Plate to cathode & internal

shield & grid No.3, grid

No.2, and heater 4.2 μ fTriode grid to pentode plate . . . 0.018 max. μ fPentode grid No.1 to triode plate. 0.005 max. μ fPentode plate to triode plate. . . 0.17 max. μ f

Characteristics, Class A₁ Amplifier:

	Triode Unit	Pentode Unit	
Plate-Supply Voltage	250	45 200	volts
Grid-No.2 Supply Voltage	-	125 125	volts
Grid-No.1 Voltage.	-2	0 -	volts
Cathode Resistor	-	- 68	ohms
Amplification Factor	100	- -	
Plate Resistance (Approx.) . . .	37000	- 75000	ohms
Transconductance	2700	- 12500	μ mhos
Plate Current.	2	40* 25	ma
Grid-No.2 Current.	-	15* 7	ma
Grid-No.1 Voltage (Approx.) for			
plate μ a = 100	-	- -9	volts
Grid Voltage (Approx.) for			
plate μ a = 20.	-5	- -	volts

Mechanical:

Operating Position Any

Maximum Overall Length 2-5/8"

Maximum Seated Length. 2-3/8"

Length, Base Seat to Bulb Top (Excluding tip). . . 2" $\pm$ 3/32"

Diameter 0.750" to 0.875"

Dimensional Outline See General Section

Bulb T6-1/2

6EB8




6EB8

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Base. Small-Button Noval 9-Pin (JEDEC No.E9-1)
 Basing Designation for BOTTOM VIEW. 9DX

Pin 1 - Triode Cathode
 Pin 2 - Triode Grid
 Pin 3 - Triode Plate
 Pin 4 - Heater
 Pin 5 - Heater



Pin 6 - Pentode Cathode,
 Grid No.3,
 Internal Shield
 Pin 7 - Pentode Grid No.1
 Pin 8 - Pentode Grid No.2
 Pin 9 - Pentode Plate

AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

	Triode Unit	Pentode Unit	
PLATE VOLTAGE	330 max.	330 max.	volts
GRID-No.2 (SCREEN-GRID)			
SUPPLY VOLTAGE.	-	330 max.	volts
GRID-No.2 VOLTAGE	-	See Grid-No.2 Input	

Rating Chart at front of Receiving Tube Section

GRID-No.1 (CONTROL-GRID)			
VOLTAGE:			
Positive-bias value . . .	0 max.	0 max.	volts
PLATE DISSIPATION	1 max.	5 max.	watts
GRID-No.2 INPUT:			
For grid-No.2 voltages			
up to 165 volts	-	1.1 max.	watts
For grid-No.2 voltages			
between 165 and 330			
volts	-	See Grid-No.2 Input	

Rating Chart at front of Receiving Tube Section

PEAK HEATER-CATHODE			
VOLTAGE:			
Heater negative with			
respect to cathode. . .	200 max.	200 max.	volts
Heater positive with			
respect to cathode. . .	200 [▲] max.	200 [▲] max.	volts

Maximum Circuit Values:

	Triode Unit	Pentode Unit	
Grid-No.1-Circuit			
Resistance:			
For fixed-bias operation.	0.5 max.	0.25 max.	megohm
For cathode-bias			
operation	1 max.	1 max.	megohm



6EB8

6EB8

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE


- Without external shield.
- * This value can be measured by a method involving a recurrent wave form such that the maximum ratings of the tube will not be exceeded.
- ▲ The dc component must not exceed 100 volts.

6EB8



6EB8

AVERAGE PLATE CHARACTERISTICS TRIODE UNIT

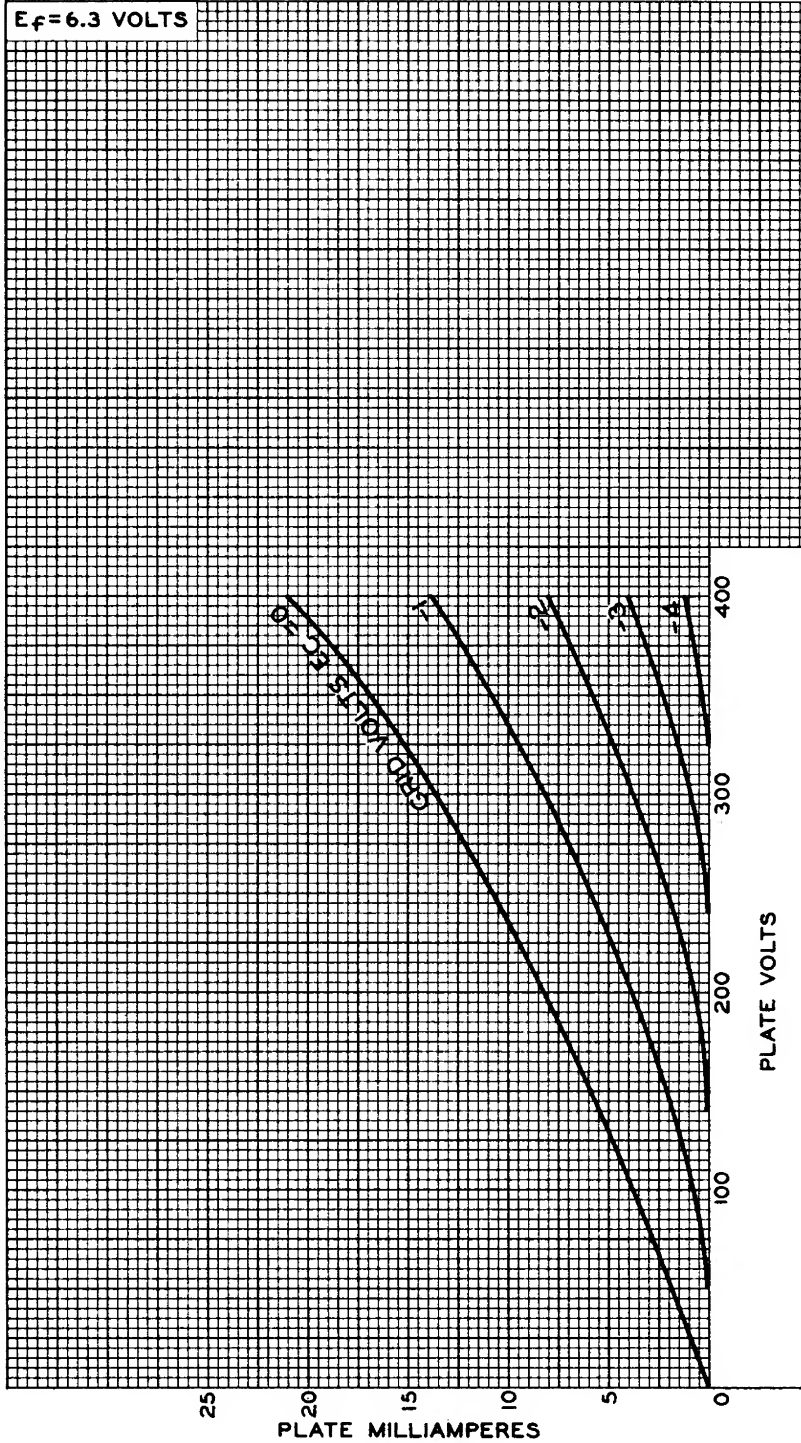




6EB8

AVERAGE CHARACTERISTICS
TRIODE UNIT

6EB8

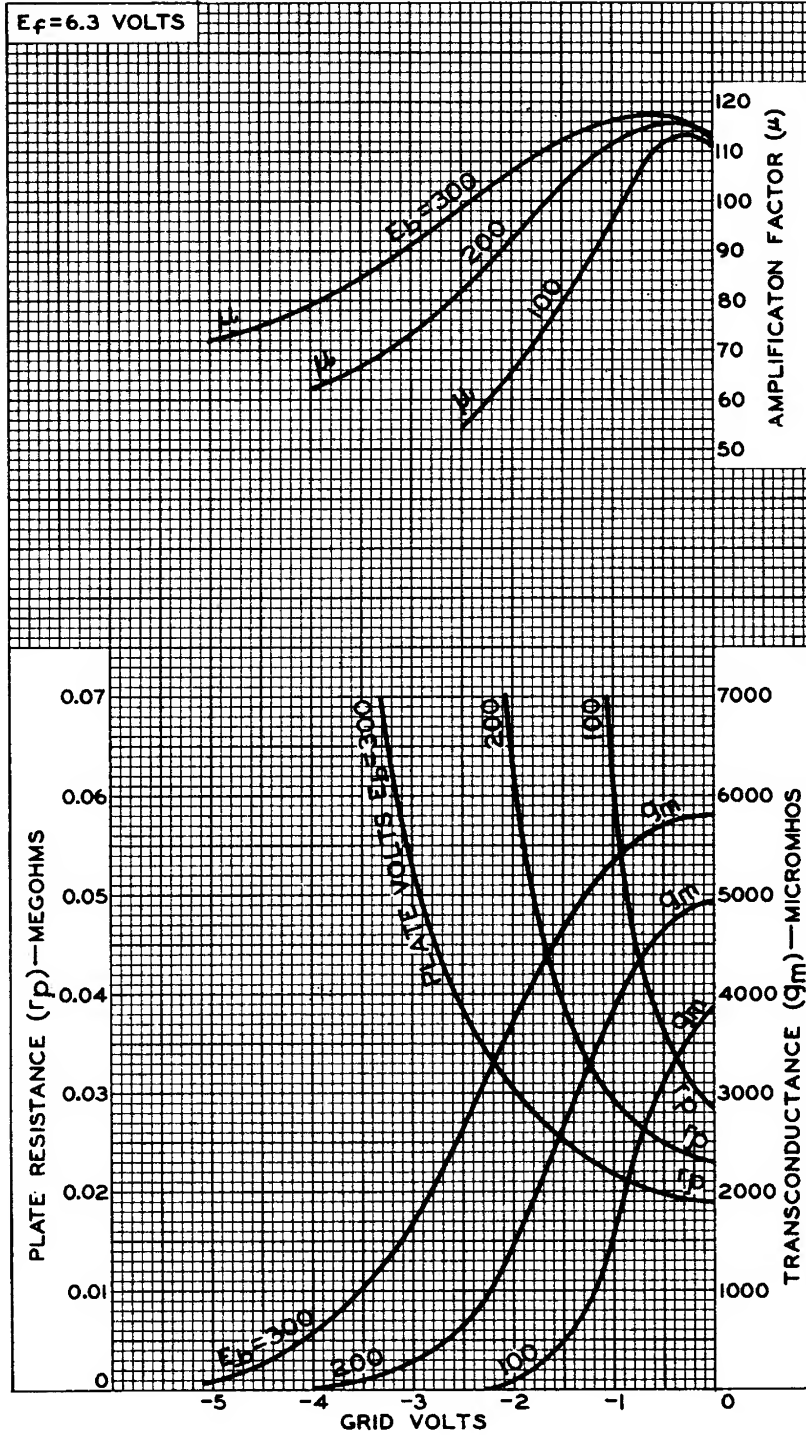


6EB8



6EB8

AVERAGE CHARACTERISTICS PENTODE UNIT

$E_f = 6.3$ VOLTS
GRID-Nº2 VOLTS = 125

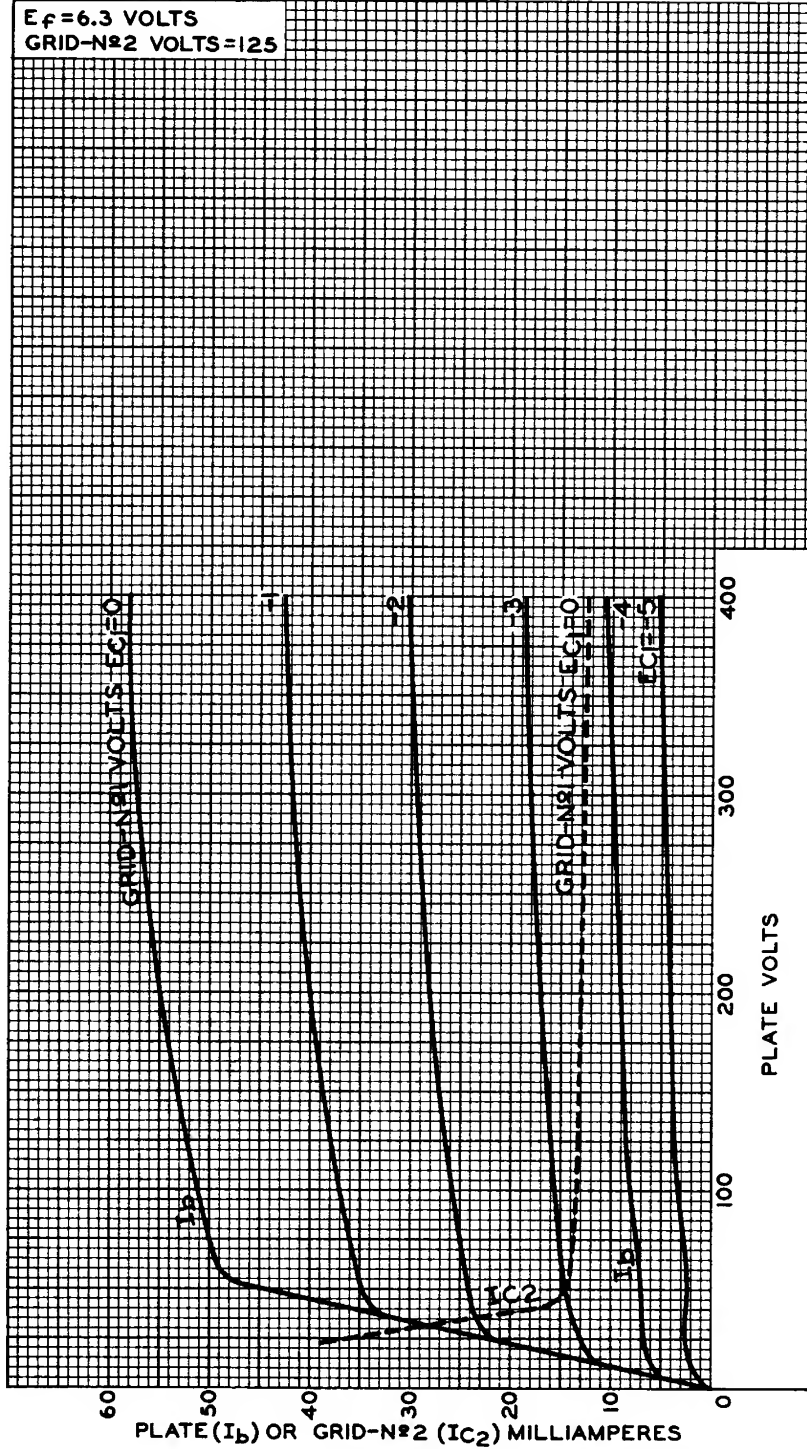

ELECTRON TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-9906




6EB8

AVERAGE CHARACTERISTICS
PENTODE UNIT

6EB8

$E_f = 6.3$ VOLTS
PLATE VOLTS = 200
GRID-N ϕ 2 VOLTS = 125

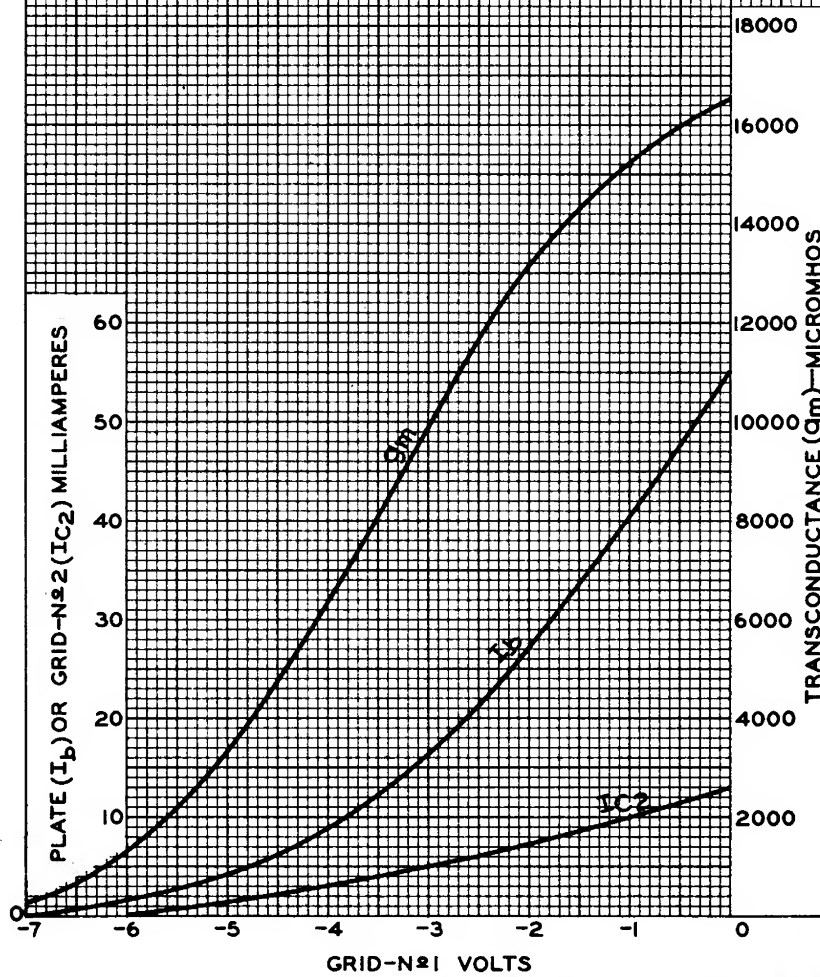

ELECTRON TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-9905